



Project:	Type:
Prepared By:	Date:

Technical Specifications

Listings

UL Listing:

Suitable for damp locations

Construction

Reflector:

Short Frosted Prismatic Acrylic Reflector 8.5 high

Reflector Component:

This component must be ordered with HAYBAY fixture to make a complete fixture.

Cold Weather Starting:

Minimum starting temperature is -40° F (-40° C)

Ambient Temperature:

Suitable for use 12 hours a day, 5 days a week in ambient temperatures up to 50° C and for 24/7 use in ambient temperatures up to 40° C.

Other

Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.


Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

Dimensions

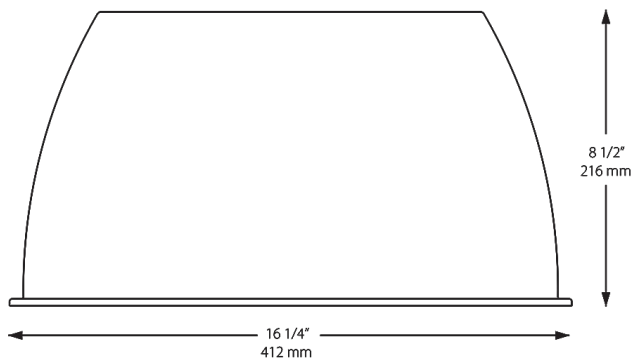

Features

Reflectors tailor the Haybay to specific applications:

Downlight only, uplight + downlight, and high or low mounting heights.

5-Year warranty

Ordering Matrix

Family	Reflector
R16	SPF

AR = 11" Clear Prismatic Acrylic
PF = 11" Frosted Prismatic Acrylic
SP = 8.5" Short Clear Prismatic Acrylic
SPF = 8.5" Short Frosted Prismatic Acrylic
SA = 5" Short White Aluminum