



Ultra-economy wall pack with a sleek, contemporary look.

Color: Bronze

Weight: 5.3 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

| | |
|-------------|------------------|
| Type | Constant Current |
| 120V | 0.75A |
| 208V | 0.42A |
| 240V | 0.36A |
| 277V | 0.34A |
| Input Watts | 89.8W |

LED Info

| | |
|----------------|--------------|
| Watts | 86W |
| Color Temp | 3000K (Warm) |
| Color Accuracy | 82 CRI |
| L70 Lifespan | 50,000 Hours |
| Lumens | 9,001 |
| Efficacy | 100.2 lm/W |

Technical Specifications

Listings

UL Listed:

Suitable for wet locations. Suitable for mounting within 4 feet of the ground.

Electrical

Driver:

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.75A, 208V: 0.42A, 240V: 0.36A, 277V: 0.34A

THD:

2.74% at 120V, 9.16% at 277V

Power Factor:

99.7% at 120V, 96.2% at 277V

Surge Protection:

2.5kV

Note:

All values are typical (tolerance +/- 10%)

Photocell:

120-277V Button Photocell Included. Photocell is compatible with 120V-277V.

Performance

Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Construction

Cold Weather Starting:

Minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

Mounting:

Housing contains two (2) conduit entry points, one on each side, and knockout pattern for junction box or direct wall mounting.

Lens:

Glass

Technical Specifications (continued)

Construction

Gaskets:

High-temperature silicone

Green Technology:

Mercury and UV free. RoHS-compliant components.

Finish:

Formulated for high durability and long-lasting color

Other

Replacement:

Replaces up to 250W Metal Halide


5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

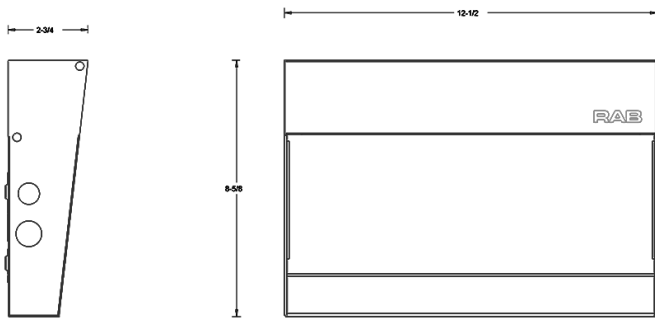

Features

- Ultra-economy wall pack with a sleek, contemporary look
- Covers footprint of medium-sized HID wall packs
- Available in various lumen packages

Ordering Matrix

| Family | Lumen Package | Color Temp | Options |
|--------|--|--|---|
| W17 | 90L | Y | /PCU |
| | 30L = Small (2900lm, 30W) 36L = Small (3600lm, 33W) 55L = Medium (5500lm, 50W) 75L = Medium (7500lm, 69W) 90L = Medium (9000lm, 86W) 150L = Large (15000lm, 139W) | Blank = 5000K (Cool) Y = 3000K (Warm) | Blank = No Option /PCU = 120-277V Button Photocell |