



PL-L Long 4-Pin Base

PL-L 50W/830/4P/RS


Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

Product data

General Information		Lamp Current (Nom)		Voltage (Nom)	
Cap-Base	2G11 [2G11]		0.430 A		150 V
Life To 50% Failures (Nom)	10000 h				
System Description	Rapid Start (RS)				
Light Technical		Controls and Dimming			
Color Code	830 [CCT of 3000K]	Dimmable	Yes		
Initial lumen (Nom)	4000 lm	Mechanical and Housing			
Color Designation	Warm White (WW)	Cap-Base Information	4P		
Lumen Maintenance 10000 h (Nom)	91 %	Product Data			
Lumen Maintenance 2000 h (Nom)	94 %	Order product name	PL-L 50W/830/4P/RS		
Lumen Maintenance 5000 h (Nom)	92 %	EAN/UPC - Product	046677112677		
Chromaticity Coordinate X (Nom)	440	Order code	347476		
Chromaticity Coordinate Y (Nom)	403	Numerator - Quantity Per Pack	1		
Correlated Color Temperature (Nom)	3000 K	Numerator - Packs per outer box	25		
Luminous Efficacy (rated) (Nom)	80 lm/W	Material Nr. (12NC)	927908508321		
Color Rendering Index (Nom)	82	Net Weight (Piece)	140.000 g		
Operating and Electrical		ILCOS Code	FSD-50/30/1B-L/P-2G11		
Power (Rated) (Nom)	50.0 W				

PL-L Long 4-Pin Base


Dimensional drawing




Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
PL-L 50W/830/4P/RS	39.0 mm	18.0 mm	540 mm	565 mm	571.6 mm

PL-L 50W/830/4P RS

Photometric data

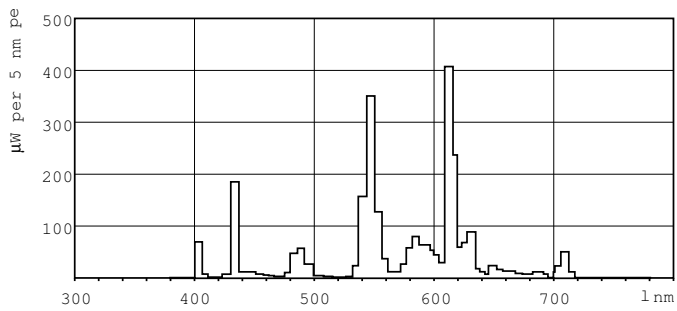

Lightcolor /830

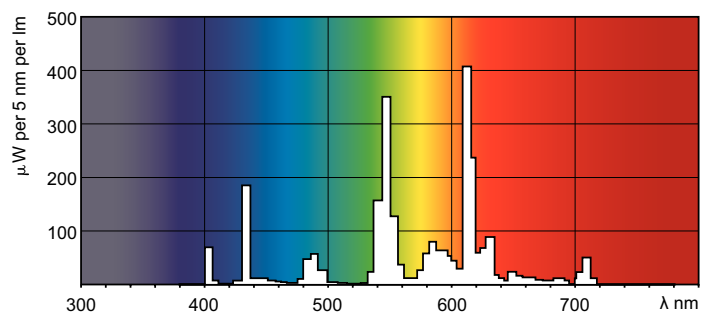

Lightcolor /830

