**EB124T** 





Project:	Туре:
Prepared By:	Date:

Lamp Info		Ballast Info		
Type:	PS-25	Type:	N/A	
Watts:	300W	120V:	N/A	
Shape/Size:	N/A	208V:	N/A	
Base:	N/A	240V:	N/A	
ANSI:	N/A	277V:	N/A	
Hours:	N/A	Input Watts:	0W	
Lamp Lumens:	N/A			
Efficacy:	N/A			
				J

# **Technical Specifications**

Color: N/A

### Construction

# Housings:

Heavy cast aluminum. Unit withstands 1490 lbs. per square inch hydrostatic pressure.

### Globe:

Impact and heat resistant clear prismatic design affords excellent light control.

### Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

#### Reflectors:

Heavy gauge aluminum with highly reflective white acrylic finish.

#### **Hub Size:**

1/2"

#### **Hub Count:**

#### Weight:

15 lb / 6.8 kg.

# **Electrical**

### Wiring:

Wiring is factory sealed. Inspection hole provides easy access to splice compartment.

### Socket:

Medium base glazed porcelain. Leads pass through sealing compound that separates lamp chamber from wiring compartment. Heavy gauge nickel plated copper components. Spring loaded center contact.

# Other

Refer to the catalog for Class and Division specifications:

#### Guard supplied:

## **Buy American Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Buy American

## Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).


### **Trade Agreements Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

### **GSA Schedule:**

Suitable in accordance with FAR Subpart 25.4.



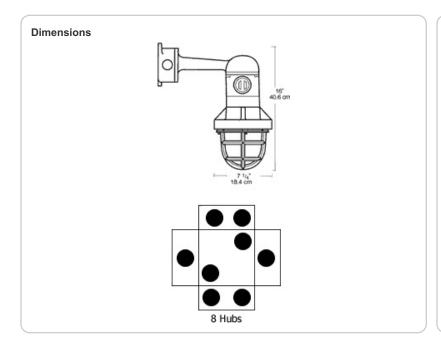

# **Features**

Fixture comes complete with built-in junction box

Cast aluminum construction with gray polyester powder coat finish

Easy relamping with a single thumb screw

Factory sealed for easy installation

Heat and impact resistant prismatic glass globe

Die cast guard

Easy field installation