



230W LED High Bay fixture with over 10,000 lumens. Available in four head configuration. Ideal for large indoor spaces, including warehouses, gymnasiums, and distribution centers. Includes built in support for Lightcloud, a wireless lighting control system and service, fully developed by RAB.

Color: White

Weight: 41.5 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type:	Constant Current	Watts:	230W
120V:	1.99A	Color Temp:	4000K
208V:	1.21A	Color Accuracy:	74 CRI
240V:	1.05A	L70 Lifespan:	100000
277V:	0.88A	Lumens:	20,777
Input Watts:	241W	Efficacy:	86 LPW
Efficiency:	95%		

## Technical Specifications

### Lightcloud

#### Lightcloud Installed:

Lightcloud is a commercial wireless lighting control system and service fully developed and supported by RAB. It's powerful and flexible, yet easy to use and install.

### Listings

#### UL Listing:

Suitable for wet locations.

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80, and have received the Department of Energy "Lighting Facts" label.

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.  
DLC Product Code: PHHPF4CP

### Electrical

#### Drivers:

Constant Current, Class 2, 100-277V, 50/60 Hz, 120V: 1.99A, 208V: 1.2A, 240V: 1.04A, 277V: 0.88A, 4kV surge protection

#### Power Factor:

99.5% at 120V, 95.3% at 277V

#### THD:

3.9% at 120V, 8.8% at 277V

#### Dimming Driver:

Driver includes dimming control for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims as low as 10%.

### Optical

#### Optics:

120° downlight

### Construction

#### Cold Weather Starting:

The minimum starting temperature is -40°C/-40°F

#### Ambient Temperature:

Suitable for use in 55°C (131°F) ambient temperatures.

#### Thermal Management:

Superior thermal management with external Air-Flow fins.

#### Housing:

Precision die-cast aluminum

#### IP Rating:

Luminaire heads are rated IP66, protected against dust and water ingress.

#### Lens:

Solite glass

#### Reflector:

Vacuum-metalized polycarbonate

#### Mounting:

Flush mount, V hook for chain mount (chain by others), or 3/4" NPS for pendant mount (pendant by others).

#### Gaskets:

High temperature silicone gaskets.

### Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

### Green Technology:

Mercury and UV free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOC or toxic heavy metals.

### LED Characteristics

#### Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

#### LEDs:

Long-life, high-efficiency surface mount LEDs

#### Color Stability:

LED Color temperature is warranted to shift no more than 200K in CCT over a 5 year period.

#### Color Uniformity:

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2011.

### Other

#### Lightcloud Compatibility:

This product is compatible with the

#### Equivalency:

FALCOR 230W is equivalent to 400 Watt MH.

## Technical Specifications (continued)

### Other

#### California Title 24:

FALCOR/D10 with optional 0-10V dimming driver complies with 2013 California Title 24 building and electrical codes as a commercial indoor fixture for corridors, stairwells, warehouses, and covered parking garages when used with the RAB Stealth Dimmer. Use catalog code STLDIM10 to order a Stealth Dimmer module.

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

#### Country of Origin:

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

#### Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

#### Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).


#### Trade Agreements Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

#### GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

### Dimensions

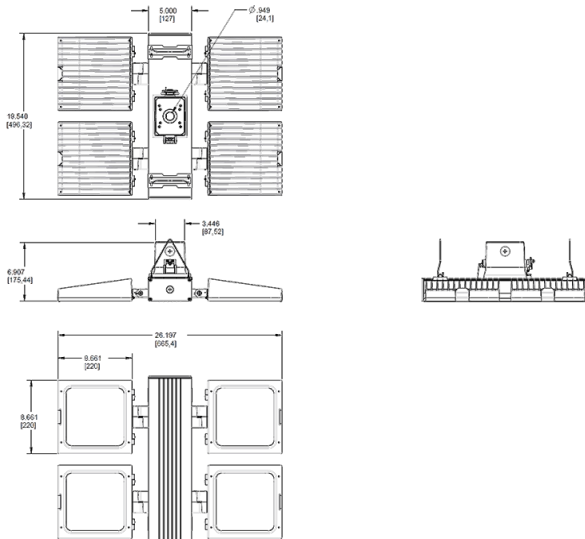

### Features

- High-output, high performance industrial high bay
- IP66 rating keeps dust and water out
- High ambient temperature rating of 55°C
- Diffusion lens reduces glare
- Multiple mounting options: pendant, surface or chain
- 100,000-Hour LED lifespan
- 5 Year warranty
- Built in support Lightcloud™
- Easy setup - simply power on, confirm device connectivity and call 844-LIGHTCLOUD

### Ordering Matrix

Family	Watts	Color Temp	Finish	Dimming	Lightcloud
FALCOR	230	N	W	/D10	/LC
	230 = 230W	Blank = 5000K (Cool) Y = 3000K (Warm) N = 4000K (Neutral)	W = White	Blank = No Dimming /D10 = Dimmable	/LC = Lightcloud