HID-36-EX39-850-BYP-PT

		-			
			0 0 0 0 0 0		
			00		
RAB		ł	10000		


Replace 50 - 400W MH lamps for post tops, low bays, and high bays, in enclosed or open fixtures. 50,000-hour lifespan. Use 76% less energy than MH.
Color: White Weight: 1.4 lbs

Technical Specifications

Listings	Bulb Type:	LED Characteristics
UL Listed:	Post Top	Lifespan:
Yes	Base Type:	50,000-hour LED lifespan based on IES LM-70 results
UL Classified:	EX39, Mogul Base	Other
Yes	Dimmable:	Equivalent:
FCC:	No	150W HID Post Top
Yes	Construction	Warranty:
Rohs:	Operating Temperature:	5 years
Yes	-20 - 40°C	Optical
CEC Status:	Bare Lamp Illuminated Length (inches):	Beam Angle:
Lawful for sale in California	3.94"	360°
DLC Qualified:	MOL (inches):	Shipping Information
Yes	8.35"	Case Qty:
DLC Listed:	MOD (inches):	12
This product is on the Design Lights Consortium (DLC)	3.35"	Case Dimensions:
Qualified Products List and is eligible for rebates from DLC Member Utilities.	Minimum Compartment Size (inches):	15.55 x 11.81 x 10.24
DLC Product Code: PV8KKCIM	Length: 7.99"	Pallet Quantity of Pieces:
Description	Width: 7.99"	216
Lamp Type:	Height: 11.02"	Pallet Dimensions:
HID		37.4 x 33.07 x 35.43

Project:		Туре:	
Prepared By	y:	Date:	
Driver Info		LED Info	
Driver Info Watts:	36W	LED Info Input Voltage:	100-277V
2	36W 5000K (Daylight)		100-277V 0.9
Watts:		Input Voltage:	
Watts: Color Temp:	5000K (Daylight)	Input Voltage: Power Factor:	0.9
Watts: Color Temp: Lumens:	5000K (Daylight) 5,400 150 LPW	Input Voltage: Power Factor: Flicker:	0.9 <30%

HID-36-EX39-850-BYP-PT

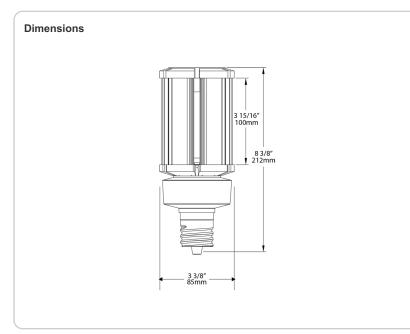

Features

Replacement for Conventional HID Lamps

Water and dust resistant - ideal for outdoor fixtures

Thermal technology extends LED lifetime

Integrated Heat Sink Quickly Dissipates Heat without onboard fan

Internal Driver, Eliminates the Need for External Driver or Ballast

Includes 4kV Surge Protection

Instantly powers on without warm up time