## HID-40-H-E26-840-BYP-WP


			Project:		Туре:		
			Prepared By:		Date:	Date:	
TAAD TAAD		Driver Info		LED Info			
			Watts	40.00W	Input Voltage		
	-		Color Temp	4000K (Cool White)	Power Facto		
			Lumens	6,200	Flicker	<30%	
	Replace 100W up to 200W metal halide lamps				THDi	N/A	
	Water/dust resistant. Uses 76% less energy th where you need it.	an Min. 350 Totalable base puts light	Efficacy	155 LPW	R9		
			Color Accura				
	Color: White	Weight: 1.7 lbs	L70 Accuracy	/ 50,000			

## **Technical Specifications**

Technical Specifications	CRI:	Installation Type:		
Product Type:	80	Type B, Ballast Bypass		
HID	Base Type:	Installation Orientation:		
Bulb Shape:	E26	Universal Installation		
Wall Pack	L70 Lifespan:	For Use in Emergency Fixtures:		
Wattage:	50,000 hours	No		
40W	Operating Temperature:	For Use Outdoors in Open Fixtures:		
Wattage Equivalency:	-30°C - 60°C	No		
200W HID	Dimmable:	Electrical Characteristics		
Typical Lumen Output:	No	Input Voltage:		
6200	Beam Angle: 100-277V			
Efficacy:	180°			
155 lm/W	Warranty:			
Color Temperature:	5-Year, No-Compromise Warranty			
4000K Cool White				

Technical Specifications (continued)						
Electrical Characteristics	Flicker:	UL Classified:				
Power Factor:	<30%	Yes				
>0.9	THDi:	DLC Product Code:				
Operating Frequency:	<20%	NO DLC CATEGORY				
50 / 60 Hz	Listings	CEC Status:				
Input Current @ 120V:	UL Listed:	Lawful for sale in California				
0.4mA	Yes					

## Dimensions

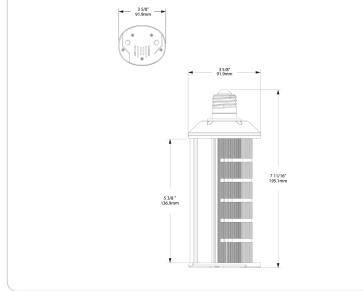

## Features

HID REPLACEMENT - Replace conventional HID lamps

BALLAST BYPASS - Internal driver eliminates the need for external driver or ballast

COMPACT DESIGN - Allows the lamp to fit in most fixtures

 $\ensuremath{\mathsf{INSTALLATION}}$  ORIENTATION - Lamps can be installed universally Base up, down or sideways

HEAT DISSIPATION - Thermal technology extends lifespan

WATER & DUST RESISTANT - Ideal for outdoor fixtures

ENCLOSED FIXTURE RATED - May be used in enclosed and open fixtures

ENERGY SAVINGS - Uses 76% less energy than traditional lamps MERCURY FREE - Environmentally friendly vs fluorescent technologies

350° ROTATABLE BASE - Direct light where needed