# HID-80-EX39-840-BYP-PT-G2



Project: Type: Prepared By: Date:



### **Features and Benefits**

HID REPLACEMENT - Replace conventional HID lamps

BALLAST BYPASS - Internal driver eliminates the need for external driver or ballast

COMPACT DESIGN - Allows the lamp to fit in most fixtures

HEAT DISSIPATION - Thermal technology extends lifespan

WATER & DUST RESISTANT - Ideal for outdoor fixtures

ENCLOSED FIXTURE RATED - May be used in enclosed and open fixtures

INSTANT ON - No warmup time required, full brightness instantly SURGE PROTECTION - Includes 4kV surge protection

## **Technical Specifications**

Product Type HID

Bulb Shape Post Top

Wattage 80W

Wattage Equivalency 320W HID

Typical Lumen Output 10800

Efficacy 135 Im/W

Color Temperature 4000K Cool White

 CRI
 80

 Base Type
 EX39

 L70 Lifespan
 50,000 hours

 Operating Temperature
 -30°C - 60°C

Dimmable No Beam Angle 360°

Warranty 5-Year, No-Compromise Warranty

Installation Type Type B, Ballast Bypass
Installation Orientation For Vertical Installation Only

For Use in Emergency Fixtures No
For Use Outdoors in Open Fixtures Yes

#### **Electrical Characteristics**

 Input Voltage
 100-277V

 Power Factor
 >0.9

 Operating Frequency
 50 / 60 Hz

 Input Current @ 120V
 0.89mA

 Flicker
 <30%</td>

 THDi
 <20%</td>

### Listings

UL Listed Yes
UL Classified Yes

This product is on the Design Lights Consortium (DLC)
DLC Listed Qualified Products List and is eligible for rebates from DLC


Member Utilities.

DLC Model Number HID-80-EX39-840-BYP-PT

DLC Product Code PLZ1631OLL04

CEC Status Lawful for sale in California



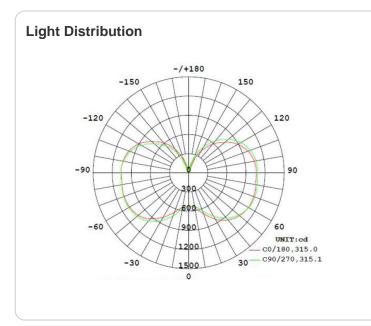



# **Minimum Compartment Size**

Length x Width x Height [mm]	Lamp Quantity	
9.8 x 9.8 x 9.1	1	


## **Case and Pallet Dimensions**

	QTY	LENGTH	WIDTH	HEIGHT
CASE	6	20.7	14.2	14
PALLET	18	30.3	43.3	46.7

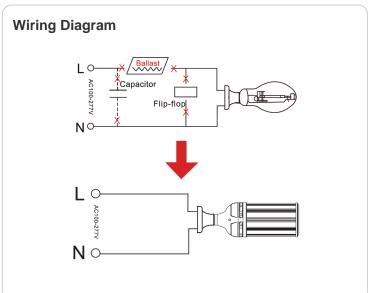

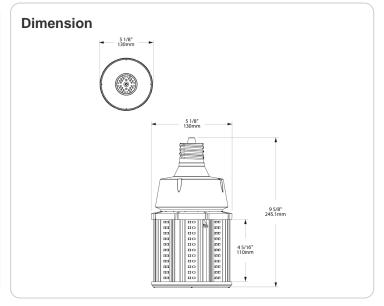


# Sensor Installation



## Compatible with:

HID-80-EX39-8xx-BYP-PT HID-100-EX39-8xx-BYP-PT HID-120-EX39-8xx-BYP-PT



## Compatible with:

HID-60-V-EX39-8xx-BYP-HB HID-80-V-EX39-8xx-BYP-HB HID-115-V-EX39-8xx-BYP-HB