



The Lightcloud Outlet is a tamper resistant duplex receptacle that delivers plug-load control and measured power monitoring for loads up to 20 amps.

Color: White

Weight: 0.4 lbs

Project:	Type:
Prepared By:	Date:

Technical Specifications

Listings

UL Listed:

Suitable for indoor

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities

Electrical

Installation:

All Lightcloud components should be installed by a licensed electrician in accordance with local codes.

Input Voltage:

125 VAC

Frequencies:

60 Hz

Electrical Ratings:

20 A @ 125VAC

Load Switching Capacity:

Tungsten: 1500W (12.5A)
CFL and LED (Electronic Ballast): 5A

Construction

Operating Temperature Range:

-20°C to 40°C

Storage Temperature Range:

-40°C to 40°C

Maximum Relative Humidity:

80%

Mounting:

Single or multi-gang junction box

Terminal:

15A - 14 AWG
20A - 12AWG
Copper Wires Only

Wireless Range

Line-of-Site:

1000 feet

Obstructions:

100 feet

Technical Specifications (continued)

Other


Warranty:

10-year full hardware warranty with 100% repair/replacement coverage for all properly installed devices. See [Lightcloud Warranty Terms](#).

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

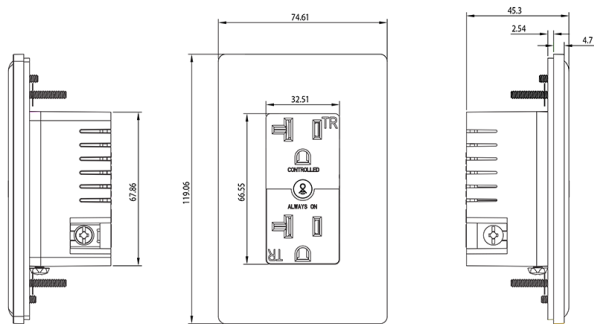

Features

- Wireless Control & Configuration
- Cloud-based Management
- Dual Power Monitoring
- Tamper Resistant

Ordering Matrix

Family	Finish
LCOUTLET	/W

/W = White