



Accessorize your LFLED with a NEMA Type: 3H x 3V or 3H x 2V spot lens.

Color: White

Weight: 0.3 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type: Constant Current
 120V: N/A
 208V: N/A
 240V: N/A
 277V: N/A
 Input Watts: 0W
 Efficiency: N/A

LED Info

Watts: 0W
 Color Temp: N/A
 Color Accuracy: N/A
 L70 Lifespan: N/A
 Lumens: N/A
 Efficacy: N/A

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Suitable for ground mounting.

Construction

Lens:

Microprismatic diffusion lens for smooth and even light distribution.

Housing:

Precision die-cast aluminum.

Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

Optical

NEMA Type:

Fixture has a NEMA Type 3H x 3V.

Other


Compatibility:

Compatible with

Patents:

The design of the LSFLED is protected by patents pending in US, Canada, China, Taiwan and Mexico.

Dimensions

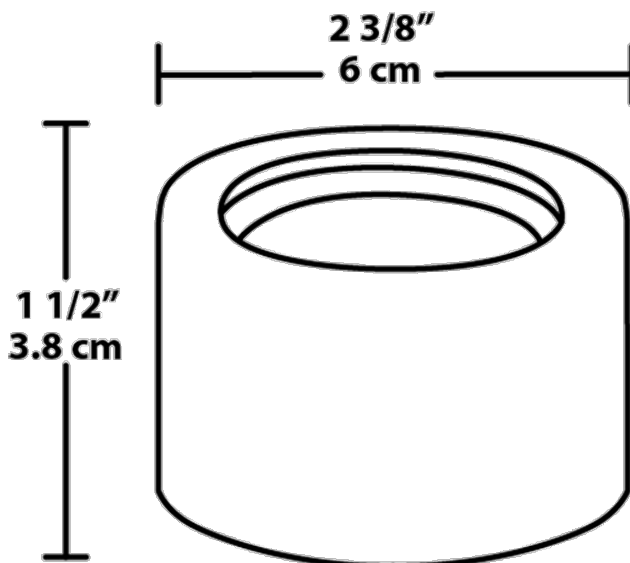

Features

- Microprismatic diffusion lens for smooth and even light distribution
- Precision die-cast aluminum housing
- 5-Year warranty

Ordering Matrix

Family	Watts	Finish
LSLFLED		
	Blank = 5W 8 = 8W	A = Bronze W = White B = Black VG = Verde Green BR = Brass