



Replace cluster and 3U-pin base compact fluorescent lamps.

Color: White

Weight: 0.3 lbs

| | |
|---------------------|--------------|
| Project: | Type: |
| Prepared By: | Date: |

| Driver Info | | LED Info | |
|-----------------|-----------------------|----------------|----------|
| Watts: | 9W | Input Voltage: | 120-277V |
| Color Temp: | 3500K (Neutral White) | Power Factor: | 0.9 |
| Lumens: | 950 | Flicker: | N/A |
| Efficacy: | 106 LPW | THDi: | <20% |
| Color Accuracy: | 82 CRI | | |
| L70 Accuracy: | 50,000 | | |

Technical Specifications

Listings

UL Recognized:

Yes

UL Classified:

Yes

FCC:

Yes

Rohs:

Yes

CEC Status:

Lawful for sale in California

Description

Lamp Type:

PLC/T Compacts

Bulb Type:

PLC/T

Base Type:

G24d, 2 Pin

Dimmable:

No

Length:

V

Material:

Glass

LED Characteristics

Installation Type:

Type B

Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

Construction

Operating Temperature:

-20 - 40°C

MOL (inches):

4.69"

MOD (inches):

1.85"

Other

Equivalent:

26W Fluorescent PLC/T

Warranty:

5 years

Shipping Information

Case Qty:

12

Case Dimensions:

8.07 x 6.1 x 5.12


Pallet Quantity of Pieces:

2880

Pallet Dimensions:

47.24 x 39.37 x 47.64

Dimensions

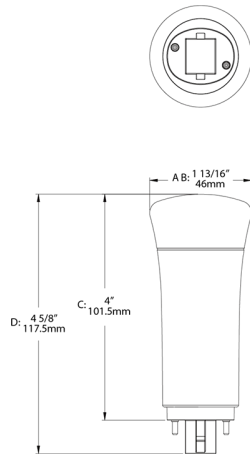

Features

Replacement for Conventional Fluorescent Lamps

Approximately 40% More Energy Efficient than Conventional Pin-Base CLF's with G24q base

Instant on, no flicker or hum

Bypass ballast to eliminate maintenance costs or use existing ballast

111+ Lumens per watt

Environmentally friendly: No Mercury Used