



Replace cluster and 3U-pin base compact fluorescent lamps.

Color: White

Weight: 0.3 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Watts:	9W	Input Voltage:	120-277V
Color Temp:	5000K (Daylight)	Power Factor:	0.9
Lumens:	1,000	Flicker:	N/A
Efficacy:	111 LPW	THDi:	<20%
Color Accuracy:	82 CRI		
L70 Accuracy:	50,000		

## Technical Specifications

### Listings

**UL Recognized:**

Yes

**UL Classified:**

Yes

**FCC:**

Yes

**Rohs:**

Yes

**CEC Status:**

Lawful for sale in California

### Description

**Lamp Type:**

PLC/T Compacts

**Bulb Type:**

PLC/T

**Base Type:**

G24d, 2 Pin

**Dimmable:**

No

**Length:**

V

**Material:**

Glass

### LED Characteristics

**Installation Type:**

Type B

**Lifespan:**

50,000-hour LED lifespan based on IES LM-70 results

### Construction

**Operating Temperature:**

-20 - 40°C

**MOL (inches):**

4.69"

**MOD (inches):**

1.85"

### Other

**Equivalent:**

26W Fluorescent PLC/T

**Warranty:**

5 years

### Shipping Information

**Case Qty:**

12

**Case Dimensions:**

8.07 x 6.1 x 5.12


**Pallet Quantity of Pieces:**

2880

**Pallet Dimensions:**

47.24 x 39.37 x 47.64

## Dimensions

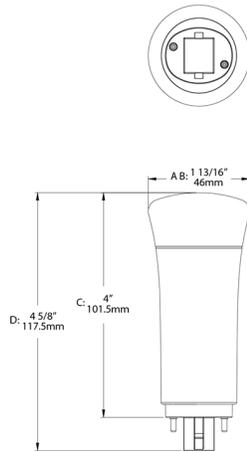

## Features

Replacement for Conventional Fluorescent Lamps

Approximately 40% More Energy Efficient than Conventional Pin-Base CLF's with G24q base

Instant on, no flicker or hum

Bypass ballast to eliminate maintenance costs or use existing ballast

111+ Lumens per watt

Environmentally friendly: No Mercury Used