

| | | | |
|-----------------|--------------|---------------------|--------------|
| Project: | Type: | Prepared By: | Date: |
|-----------------|--------------|---------------------|--------------|



Features and Benefits

- Omni directional light distribution
- Suitable for horizontal or vertical installations
- Replaces 13W and 18W G24q CFL Lamps
- Ballast Compatible. Directly Compatible with Most Existing CFL Ballasts.
- Compatible with G24q / GX24q (4-pin CFL) installations
- 50,000 hour Lifespan
- Environmentally friendly, no mercury used
- UL Classified, DLC Listed
- Rated for use in enclosed and open fixtures in dry or damp locations
- Dimmable
- 5 Year No Compromise Warranty

| Technical Specifications | | |
|---|--|--|
| <p>Performance</p> <hr/> <p>Product Type: Compact</p> <p>Input Wattage: 9.5W</p> <p>Lumens (Nominal): 1250</p> <p>Efficacy: 132 lm/W</p> <p>Color Accuracy: 80</p> <p>Color Temperature: 4000K</p> | <p>Dimmable: Yes</p> <p>L70 Lifespan: 50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations</p> <p>Construction</p> <hr/> <p>Bulb Shape: PLC-O</p> <p>Enclosure Material: Polycarbonate</p> <p>Housing Finish: White</p> <p>Lens Finish: Frosted</p> | <p>Base Type: 4-Pin G24q</p> <p>Beam Angle: 360°</p> <p>Electrical</p> <hr/> <p>THD: 20%</p> <p>Power Factor: >0.9</p> <p>Input Voltage: 120-277V</p> |

Technical Specifications (continued)

Electrical

Operating Frequency:

50 / 60 Hz

Operating Temperature:

-20°C - 45°C

Installation

Installation Method:

UL TYPE A, Plug and Play

Burning Position:

Universal

Other

Equivalency:

26W/32W G24q

Technology EQ:

CFL

Warranty (Years):

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Compliance

Safety Listing:

UL Classified, UL Recognized

Environment/Fixture Rating:

Damp / Enclosed

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15 of the FCC Rules

Model Number:

T10193(PLC-9.5-O-840-DIR)


Minimum Compartment Size

| Length x Width x Height [in] | Lamp Quantity |
|------------------------------|---------------|
| 7.3 x 6.2 x 4.8 | 1 |

Case and Pallet Dimensions

| | QTY | LENGTH (in) | WIDTH (in) | HEIGHT (in) |
|--------|-----|-------------|------------|-------------|
| CASE | 12 | 0 | 0 | 0 |
| PALLET | 674 | 0 | 0 | 0 |

Dimension

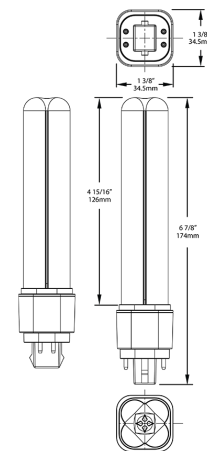

Light Distribution

