



This ultra high efficiency LED garage light delivers up to 118 lumens per Watt. An integrated motion/photo sensor option provides multi-level lighting control. Available in 30, 42 and 55 Watt versions that replace 70 to 175 Watt metal halide fixtures. Fixture measures 14" L x 14" W.

Color: Bronze Weight: 0.0 lbs

Project:	Туре:
Prepared By:	Date:

Driver Inf	o	LED Info	
Туре	Constant Current	Watts	42W
120V	0.36A	Color Temp	N/A
208V	0.19A	Color Accuracy	N/A
240V	0.18A	L70 Lifespan	N/A
277V	0.17A	Lumens	5,077
Input Watts	43.30W	Efficacy	117.3 lm/W

Technical Specifications

Listings

UL Listed:

Suitable for wet locations

California Title 24:

Can be used to conform with the requirements of California Title 24 Part 6.

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. DLC Product Code: PBHRA6C4

Electrical

Drivers:

Constant Current, Class 2 100V - 277V, 50/60 Hz. THD <20%.

THD:

6.7% at 120V, 7.6% at 277V

Power Factor:

99.3% at 120V, 97.7% at 277V

Battery Backup:

Battery backup will operate the LED Lamp for 90 minutes if power fails. Wired for 120V-277V.

Battery Backup Light Loss Factor:

0.31

Construction

Lens:

Frosted polycarbonate

Gaskets:

High-temperature silicone

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Other

Warranty:


RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

PRT42N/D10/WS/E2



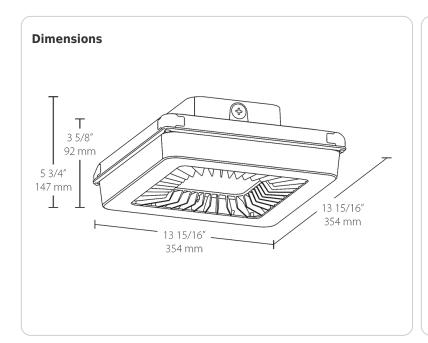

Features

Ultra-high efficiency

Pendant or surface mount

Low glare, vandal-resistant polycarbonate lens

20% uplight eliminates "cave effect"

100,000-Hour LED lifespan

5-Year, No-Compromise Warranty