PS25-32-E26-850-ND 120-277V

Type:

Date:

LED Info

Flicker


THDi

R9

Input Voltage 120-277V

N/A

N/A

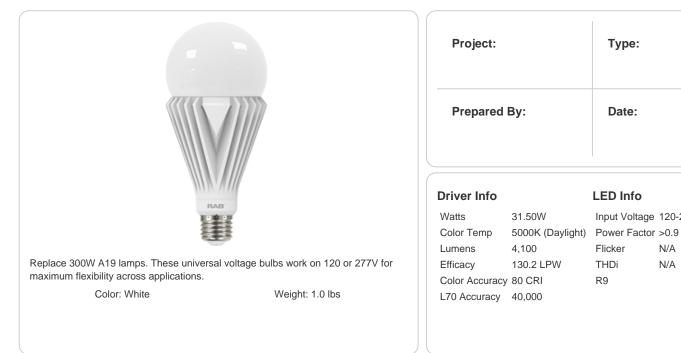


Technical Specifications

Technical Specifications	CRI:	For Use in Emergency Fixtures:
Product Type:	80	No
A-Line	Base Type:	For Use Outdoors in Open Fixtures:
Bulb Shape:	E26	No
PS25	L70 Lifespan:	Electrical Characteristics
Wattage:	40,000 hours	Input Voltage:
31.5W	Operating Temperature:	120-277V
Wattage Equivalency:	-20°C - 45°C	Power Factor:
300W Incandescent	Dimmable:	>0.9
Typical Lumen Output:	No	Operating Frequency:
4100	Beam Angle:	60 Hz
Efficacy:	230°	
128 lm/W	Warranty:	
Color Temperature:	5-Year, No-Compromise Warranty	
5000K Daylight		

Technical Specifications (continued)		
Electrical Characteristics	Listings	CEC Status:
Input Current @ 120V:	UL Listed:	Not lawful for sale in California
330mA	Yes	
Input Current @ 277V:	UL Classified:	
143mA	Yes	
THDi:	ENERGY STAR V2.0:	
≤25%	This product is ENERGY STAR® Version 2.0 Certified	

Dimensions

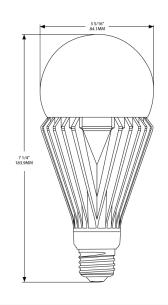

Features

UNIVERSAL BULBS: Replace 60W, 125W, 200W and 300W incandescent lamps operated on 120V or 277V $\,$

UNIVERSAL voltage bulbs have high lumen packages for industrial and commercial applications

ENERGY SAVINGS:Save up to 85% on energy

ENCLOSED FIXTURE RATED: May be used in both enclosed and open fixtures

DAMP RATED: Suitable for damp locations

SHATTERPROOF: Plastic constructed bulbs ideal for rugged applications