



RAB offers energy efficient fluorescent fixtures for large space lighting including warehouses, factories, and distribution centers. The RBAY delivers the high quality needed for these applications with strong, heavy duty 22 gauge rigid housing with no sharp edges. The superior strong-box protective foam case packaging protects the RBAY so it arrives in perfect shape and ready to install.

Color: N/A

Weight: 21.0 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Lamp Info		Ballast Info	
Type:	T8	Type:	Instant Start
Watts:	192W	120V:	1.60A
Shape/Size:	N/A	208V:	0.92A
Base:	N/A	240V:	0.80A
ANSI:	N/A	277V:	0.69A
Hours:	24,000	Input Watts:	173W
Lamp Lumens:	10,784		
Efficacy:	62 LPW		

## Technical Specifications

### Listings

#### UL Listing:

Dry Locations Only. Ceiling Mount Only.

### Construction

#### Housing:

22 gauge die formed with white powder coat finish. Y Hooks included for easy chain or cable mounting.

#### Reflector:

High performance specular aluminum reflector.

#### Ballast Minimum Starting Temperature:

-20°F.

#### Base:

Medium Bi Pin.

#### Reflector:

Alanod 320G-E with reflectivity of ≥86%.

#### Other

#### Lamps (Not supplied):

6 X 32 Watt T8 double-ended linear fluorescent lamps.

#### Mounts:

Surface or Chain (Y Hooks included).

#### Electrical

#### Ballast:

Electronic Instant Start, HPF. Quick Disconnects for safety.

#### Total Watts:

6x32W.

#### Input Volts:

120-277V.


#### Operating Amps:

1.86/.8.

#### Ballast Factor:

1.18.

## Dimensions

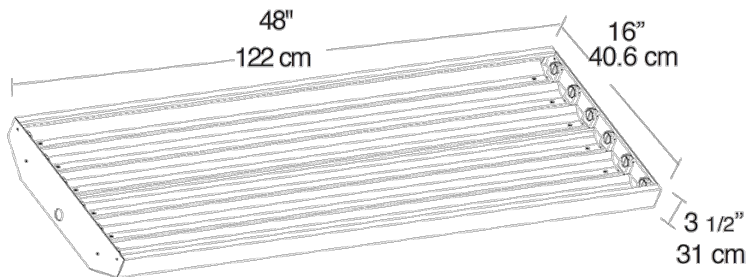

## Features

- Qualifies for EPA Act 2005 incentives
- Post-painted, high reflective gloss white powder coat finish
- High Performance, brilliant bevel segmented reflectors
- Easy wiring and maintenance access panel
- Rotary locking lamp holders for vibration security and easy relamping
- Heavy duty 22 gauge steel Rigid strong housing with no sharp edges