# SHARK8M-100YNW/D10





The eight-foot SHARK is available in 70W and 100W versions. This impact-resistant linear LED washdown fixture is ideal for car washes, tunnels, stairwells and other hard-to-reach areas where relamping is difficult and costly.

Color: White Weight: 25.7 lbs

Project:	Туре:
Prepared By:	Date:

	LED Info		
Constant Current	Watts:	100W	
A08.0	Color Temp:	3500K	
0.49A	Color Accuracy:	N/A	
0.42A	L70 Lifespan:	100000	
0.36A	Lumens:	11435	
95W	Efficacy:	121 LPW	
N/A			
	0.80A 0.49A 0.42A 0.36A 95W	Constant Current Watts: 0.80A Color Temp: 0.49A Color Accuracy: 0.42A L70 Lifespan: 0.36A Lumens: 95W Efficacy:	Constant Current         Watts:         100W           0.80A         Color Temp:         3500K           0.49A         Color Accuracy:         N/A           0.42A         L70 Lifespan:         100000           0.36A         Lumens:         11435           95W         Efficacy:         121 LPW

## **Technical Specifications**

#### Listings

#### **UL Listing:**

Marine Listed Outside Type (Saltwater).

#### ABS:

Approved for use on mobile offshore drilling units and shipping vessels

## **NEMA Rating:**

4X, protected against corrosion

## IESNA LM-79 & LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80, and have received the Department of Energy "Lighting Facts" label.

## **Electrical**

# Driver:

Class 2 Constant Current, 4kV, 100-277VAC, 50-60Hz, 120V: 0.80A, 208V: 0.49A, 240V: 0.42A, 277V: 0.36A

## **Surge Protection:**

4kV

## THD:

7.2% at 120V, 10.9% at 277V

## Power Factor:

99.3% at 120V, 94.5% at 277V

#### **Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims as low as 10%.

## Construction

#### IP Rating:

Ingress Protection rating of IP66 for dust and water

#### Housing:

5VA impact-resistant polycarbonate. 1/2" openings for conduit and bushing/cord entry. Polycarbonate is affected by cleaning agents or other liquids containing partial solvents such as low molecular weight aldehydes and ethers, ketones, esters, aromatic hydrocarbons and perchlorinated hydrocarbons.

#### Mounting:

Quick-mount, surface, stainless steel spring clips supplied. 4 additional mounting accessory kits available.

## Lens:

Diffuse polycarbonate lens for low glare and maximum protection

#### Gaskets:

EVA silicone foam

#### **Maximum Ambient Temperature:**

Suitable for use in 104° F (40°C) ambient temperatures

## **Cold Weather Starting:**

The minimum starting temperature is -22° F (-30° C).

#### Green Technology:

Mercury and UV free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOC or toxic heavy metals.

#### Finish:

Formulated for high-durability and long lasting color.

#### **LED Characteristics**

#### LEDs:

 $\label{long-life} \mbox{Long-life, high-efficiency surface mounting LEDs}$ 

## Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

#### Color Stability:

LED color temperature is warrantied to shift no more than 200K in CCT over a 5 year period

# Color Uniformity:

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2015


# Other

## Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

# SHARK8M-100YNW/D10



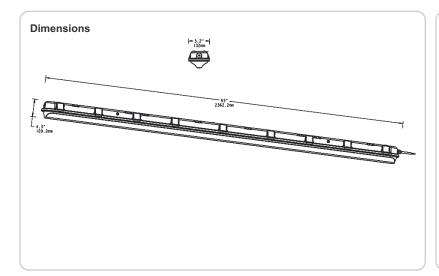

## **Features**

UL Marine Listed

American Bureau of Shipping (ABS) approved

Impact-resistant linear washdown

Ideal for car washes, tunnels and stairwells

Mounting options:

Chain, junction box, angled surface mount, ceiling mount or vandalresistant surface mount

IP66 AND NEMA 4X ratings protect against dust, water ingress & corrosion

5-Year, no compromise warranty

100,000-Hour LED lifespan

Ordering Matrix						
Family	Length	Watts	Color Temp	Finish	Voltage	Dimming
SHARK	8M	100	YN	W		/D10
	8M = 8 ft Marine Listed	<b>100</b> = 100W <b>70</b> = 70W	Blank = 5000K (Cool) Y = 3000K (Warm) YN = 3500K (Warm Neutral) N = 4000K (Neutral)	<b>W</b> = White	<b>Blank</b> = 120-277V / <b>480</b> = 480V	D10 = Dimmable