



Replace existing nominal T5, high-output fluorescent tubes.

Color: White

Weight: 0.5 lbs

Project:	Type:
Prepared By:	Date:

Driver Info	LED Info
Watts: 25W	Input Voltage: Ballast Dependent
Color Temp: 3500K (Neutral White)	Power Factor: Ballast Dependent
Lumens: 3,300	Flicker: N/A
Efficacy: 132 LPW	THDi: <20%
Color Accuracy: 82 CRI	
L70 Accuracy: 50,000	

Technical Specifications

Listings

UL Listed:

Yes

NSF:

Complies with NSF

FCC:

Yes

Rohs:

Yes

CEC Status:

Lawful for sale in California

DLC Qualified:

Yes

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.
DLC Product Code: PVKG3ZPI

Description

Lamp Type:

Linear T5

Bulb Type:

T5

Base Type:

G5, Minature Bipin

Dimmable:

No

Length:

4ft

Material:

Glass

LED Characteristics

Installation Type:

Type A, Plug and Play

Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

Construction

Operating Temperature:

-20 - 40°C

MOL (inches):

45.8"

MOD (inches):

0.65"

Other

Equivalent:

54W Fluorescent T5

Warranty:

5 years

Optical

Beam Angle:

240°

Shipping Information

Case Qty:

25

Case Dimensions:

47.83 x 7.09 x 7.48


Pallet Quantity of Pieces:

900

Pallet Dimensions:

49.21 x 39.37 x 49.61

Dimensions

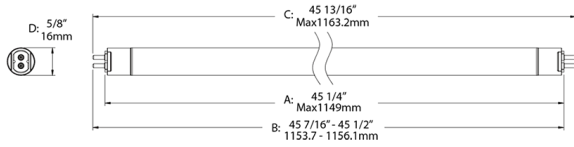

Features

Replacement for conventional Fluorescent T5 linear tubes

Plug and Play, no rewiring, no tools, no instructions

Compatible with most commercial ballasts, refer to our published compatibility guide

Suitable for use in enclosed and open fixtures

Approximately 40% More Energy Efficient than Standard 54w T5 Lamps

Start up instantly, no flicker or hum like conventional fluorescent tubes

Environmentally friendly, no mercury used and are easy to recycle