



Replace existing fluorescent tubes. Glass and plastic models available.

Color: Frosted white

Weight: 0.5 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

## Driver Info

Watts	11W
Color Temp	3000K (Warm White)
Lumens	1,800
Efficacy	171.4 LPW
Color Accuracy	80 CRI
L70 Accuracy	50,000

## LED Info

Input Voltage	Ballast Dependent
Power Factor	Ballast Dependent
Flicker	N/A
THDi	<25%
R9	

## Technical Specifications

### Listings

#### UL Listed:

Yes

#### NSF Listing:

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones

#### FCC:

Yes

#### Rohs:

Yes

#### DLC Qualified:

Yes

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. DLC Product Code: PLGLY1Y77LR8

### Description

#### Lamp Type:

Linear T8

#### Bulb Type:

T8

#### Base Type:

G13, Medium Bipin

#### Length:

4ft

#### Material:

Glass

### LED Characteristics

#### Installation Type:

Type A, Plug and Play

### Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

### Other

#### Equivalent:

32W Fluorescent T8

#### Warranty:


5-years

### Construction

#### Environment Friendly:

No mercury used

## Dimensions

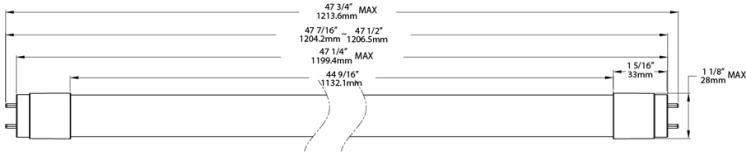

## Features

- FLUORESCENT REPLACEMENT** - Replacement for conventional fluorescent T8 linear tubes
- EASY TO INSTALL** - Simply plug and play No rewiring, no tools, no instructions
- 50,000-HOUR LIFESPAN** - Lasts 1.6x longer than conventional fluorescent tubes
- ENCLOSED FIXTURE RATED** - May be used in enclosed and open fixtures
- DIFFUSION COATING** - Will maintain the same light quality over time and won't yellow, shrink, or wrinkle
- BALLAST COMPATIBLE** - Please check Compatibility List
- SAVE ENERGY AND MONEY** - Approximately 40% more efficient than conventional T8 lamps
- INSTANT ON** - No warmup time required, full brightness instantly
- MERCURY FREE** - Environmentally friendly vs fluorescent technologies

## Ordering Matrix

Family	Lamp Power	Length	Material	Base Type	CRI/Color Temp	Installation Type
T8	10.5	48	G		830	DIR
	6 = 17W 8 = 25W 12 = 32W 15 = 32W	24 = 2 ft. 36 = 3 ft. 48 = 4 ft.	G = Glass P = Plastic	Blank = G13	830 = 3000K 835 = 3500K 840 = 4000K 850 = 5000K	DIR = Ballast Compatible