



Replace existing fluorescent tubes. Glass and plastic models available.

Color: Frosted white

Weight: 0.5 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Watts 11W
 Color Temp 3500K (Neutral White)
 Lumens 1,750
 Efficacy 166.7 LPW
 Color Accuracy 80 CRI
 L70 Accuracy 50,000

LED Info

Input Voltage Ballast Dependent
 Power Factor Ballast Dependent
 Flicker N/A
 THDi <25%
 R9

Technical Specifications

Listings

UL Listed:

Yes

NSF Listing:

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones

FCC:

Yes

Rohs:

Yes

DLC Qualified:

Yes

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. DLC Product Code: PLYCVYW0VWHB

Description

Lamp Type:

Linear T8

Bulb Type:

T8

Base Type:

G13, Medium Bipin

Length:

4ft

Material:

Glass

LED Characteristics

Installation Type:

Type A, Plug and Play

Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

Other

Equivalent:

32W Fluorescent T8

Warranty:


5-years

Construction

Environment Friendly:

No mercury used

Dimensions

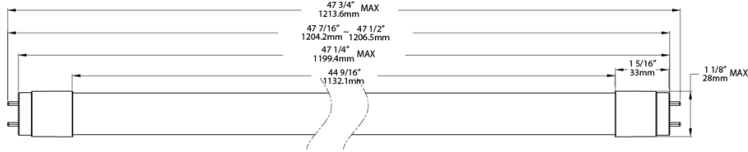

Features

- FLUORESCENT REPLACEMENT** - Replacement for conventional fluorescent T8 linear tubes
- EASY TO INSTALL** - Simply plug and play No rewiring, no tools, no instructions
- 50,000-HOUR LIFESPAN** - Lasts 1.6x longer than conventional fluorescent tubes
- ENCLOSED FIXTURE RATED** - May be used in enclosed and open fixtures
- DIFFUSION COATING** - Will maintain the same light quality over time and won't yellow, shrink, or wrinkle
- BALLAST COMPATIBLE** - Please check Compatibility List
- SAVE ENERGY AND MONEY** - Approximately 40% more efficient than conventional T8 lamps
- INSTANT ON** - No warmup time required, full brightness instantly
- MERCURY FREE** - Environmentally friendly vs fluorescent technologies

Ordering Matrix

Family	Lamp Power	Length	Material	Base Type	CRI/Color Temp	Installation Type
T8	10.5	48	G		835	DIR
	6 = 17W 8 = 25W 12 = 32W 15 = 32W	24 = 2 ft. 36 = 3 ft. 48 = 4 ft.	G = Glass P = Plastic	Blank = G13	830 = 3000K 835 = 3500K 840 = 4000K 850 = 5000K	DIR = Ballast Compatible