



Replace T8 or T12 fluorescent tubes. Double-ended line voltage wiring. Works with shunted and non-shunted sockets - no need to change sockets.

Color: White

Weight: 0.4 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

## Driver Info

Watts 12.00W  
Color Temp 5000K (Daylight)  
Lumens 1,450  
Efficacy 120.8 LPW  
Color Accuracy 82 CRI  
L70 Accuracy 50,000

## LED Info

Input Voltage 120-277  
Power Factor >0.9  
Flicker N/A  
THDi N/A  
R9

## Technical Specifications

### Technical Specifications

#### Product Type:

Linear

#### Bulb Shape:

T8

#### Nominal Length:

3FT

#### Finish:

Frosted

#### Wattage:

12W

#### Wattage Equivalency:

21W/25W Fluorescent

#### Typical Lumen Output:

1450

#### Efficacy:

121 lm/W

#### Color Temperature:

5000K Daylight

#### CRI:

82

#### Base Type:

G13

#### L70 Lifespan:

50,000 hours

#### Operating Temperature:

-20°C - 45°C

#### Dimmable:

No

#### Beam Angle:

220°

#### Warranty:

5-Year, No-Compromise Warranty

#### Installation Type:

Type B, Double Ended wiring

#### For Use in Emergency Fixtures:

No

#### For Use Outdoors in Open Fixtures:

No

## Technical Specifications (continued)

### Electrical Characteristics

#### Input Voltage:

120-277V

#### Power Factor:

>0.9

#### Operating Frequency:

50 / 60 Hz

#### Input Current @ 120V:

98mA

#### Input Current @ 277V:

51mA

#### THDi:

<20%

### Listings

#### UL Recognized:

Yes

#### UL Classified:

Yes


#### NSF Listing:

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones

#### CEC Status:

Lawful for sale in California

## Dimensions

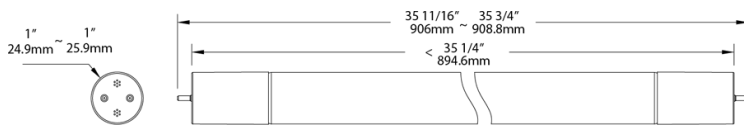

## Features

**FLUORESCENT REPLACEMENT** - Replace conventional fluorescent T8 and T12 linear tubes

**EASY TO INSTALL** - Simply cut the ballast out, and rewire sockets directly to line voltage

**SAVE ENERGY AND MONEY** - Provides same output as fluorescent but uses far less energy

**SAVE ENERGY AND MONEY** - Provides same output as fluorescent but uses far less energy

**ENCLOSED FIXTURE RATED** - May be used in enclosed and open fixtures

**DIFFUSION COATING** - Will maintain the same light quality over time and won't yellow, shrink, or wrinkle

**BALLAST BYPASS** - Internal driver eliminates the need for external ballasts or drivers

**INSTANT ON** - No warmup time required, full brightness instantly

**LOW FLICKER** - Less than 5% flicker

**MERCURY FREE** - Environmentally friendly vs fluorescent technologies

**SHUNTED AND NON-SHUNTED** - Works on shunted and non-shunted sockets