T8-12-48GC-840-DIR

		Project:		Туре:	
RAB		Prepared	Ву:	Date:	
Replace existing T8 fluorescent tubes. Plug and Play a shatter resistant coated glass construction Color: White	tubes, no rewiring required with Weight: 0.5 lbs	Driver Info Watts Color Temp Lumens Efficacy Color Accuracy L70 Accuracy			Ballast Dependent Ballast Dependent Ballast Dependent N/A

Technical Specifications


Technical Specifications	Efficacy:	Beam Angle:	
Product Type:	150 lm/W	180°	
Linear	Color Temperature:	Warranty:	
Bulb Shape:	4000K Cool White	5-Year, No-Compromise Warranty	
Т8	CRI:	Installation Type:	
Nominal Length:	80	Type A, Plug and Play	
4FT	Base Type:	For Use in Emergency Fixtures:	
Finish:	G13	No	
Frosted	L70 Lifespan:	For Use Outdoors in Open Fixtures:	
Wattage:	50,000 hours	No	
12W	Operating Temperature:		
Wattage Equivalency:	-20°C - 45°C		
32W Fluorescent	Dimmable:		
Typical Lumen Output:	No		
1800			

T8-12-48GC-840-DIR

Technical Specifications (continued)

Input Current @ 277V:	DLC Product Code:
Ballast Dependent	P70EGKT2
Flicker:	CEC Status:
Ballast Dependent	Lawful for sale in California
THDi:	
≤25%	
Listings	
UL Listed:	
Yes	
	Ballast Dependent Flicker: Ballast Dependent THDi: ≤25% Listings UL Listed:

Dimensions

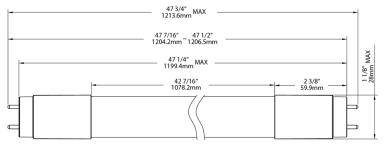

Features

FLUORESCENT REPLACEMENT - Replace conventional fluorescent T8 linear tubes

 EASY TO INSTALL - Simply plug and play No rewiring, no tools, no instructions

50,000-HOUR LIFESPAN - Lasts 1.6x longer than conventional fluorescent tubes

ENCLOSED FIXTURE RATED - May be used in enclosed and open fixtures

DIFFUSION COATING - Will maintain the same light quality over time and won't yellow, shrink, or wrinkle

BALLAST COMPATIBLE - Please check Compatibility List

SAVE ENERGY AND MONEY - Approximately 40% more efficient than conventional T8 lamps

INSTANT ON - No warmup time required, full brightness instantly

MERCURY FREE - Environmentally friendly vs fluorescent technologies