

Replace conventional T5/T8/T12 fluorescent tubes. Double-ended line voltage wiring. Works with shunted and non-shunted sockets - no need to change sockets.

Color: White Weight: 0.6 lbs

Project:	Туре:
Prepared By:	Date:

Driver Info LED Info

Input Voltage: Watts: 14W 120-277V Color Temp: 5000K (Daylight) Power Factor: 0.9 Lumens: 1,800 Flicker: N/A 129 LPW THDi: <20% Efficacy:

Color Accuracy: 82 CRI L70 Accuracy: 50,000

Technical	Specifica	tions
. ooiiiiioai	Оробинов	

Listings

UL Recognized:

Yes

UL Classified:

Yes

NSF:

Complies with NSF FCC:
Yes

Rohs:

Yes
CEC Status:

Lawful for sale in California

DLC Qualified:

Yes

DLC Listed:

This product is on the Design Lights Consortium (DLC)
Qualified Products List and is eligible for rebates from
DLC Member Utilities

DLC Member Utilities.

DLC Product Code: PJ5VSR8I

Description

Lamp Type: Linear T8 **Bulb Type:**

T8

Base Type:

G13, Medium Bipin

Dimmable:

No

Length:

4ft

Material:

Glass

LED Characteristics

Installation Type:

Type B, Ballast Bypass, Double Ended Wire

Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

Construction

Operating Temperature:

-20 - 40°C

MOL (inches):

47.78"

MOD (inches):

1.02"

Other

Equivalent:

32W Fluorescent T8

Warranty: 5 years Optical

Beam Angle:

240°

Shipping Information

Case Qty:

25

Case Dimensions:


48.82 x 5.91 x 5.91

Pallet Quantity of Pieces:

1050

Pallet Dimensions:

49.21 x 39.37 x 46.06

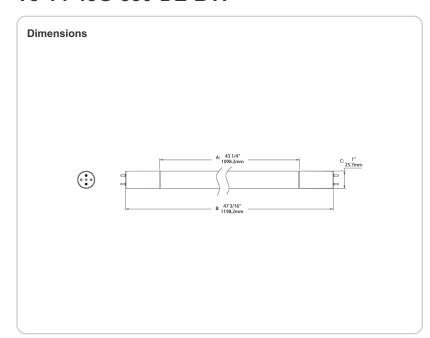

Features

Internal Driver eliminates the need for external ballasts or drivers

Can be wired either using Single Ended or Double Ended wiring method for maximum flexibility in the field and simplifies stocking multiple skus

Suitable for use in enclosed and open fixtures

Approximately 40% More Energy Efficient that Standard T8 Lamps

Start up instantly, no flicker or hum like conventional fluorescent tubes

Environmentally friendly, no mercury used and are easy to recycle