
T8-6-24P-830-DIR

RAB[®] Lamps

	Project:		Туре:	
	Prepared	By:	Date:	
RAB	Driver Info Watts:	6W	LED Info	
Replace existing fluorescent tubes. Glass and plastic m	Color Temp: Lumens: Efficacy: Color Accuracy:	3000K (Warm White) 800 133 LPW 80 CRI	Power Factor: Ballast Dependent Flicker: N/A THDi: <20%	
Color: White W	eight: 0.2 lbs	,		
Listings UL Listed: ^{Yes}	Base Type: G13, Medium Bipin Dimmable:	MOD (inches): 0.5" Other		
NSF:	No	Equivalent:		
Complies with NSF	Length:	17W Fluorescent	Т8	
FCC:	2ft	Warranty:		
Yes	Material:	5 years		
Rohs:	Plastic	Optical		
Yes	LED Characteristics	Beam Angle:		
CEC Status:	Installation Type:	160°		
_awful for sale in California	Type A, Plug and Play	Shipping Infor	mation	
DLC Qualified:	Lifespan:	Case Qty:		
Yes	50,000-hour LED lifespan based on IES LM-70 results	25		
DLC Listed:	Construction	Case Dimensions:		
This product is on the Design Lights Consortium (DLC)	Operating Temperature:	24.6 x 6.69 x 6.61		
Qualified Products List and is eligible for rebates from DLC Member Utilities.	-20 - 40°C	Pallet Quantity of Pieces:		
DLC Product Code: P69C84MY	Bare Lamp Illuminated Length (inches):	1500		
		Pallet Dimensions:		
Description	23.22"			
	23.22" MOL (inches):	49.21 x 39.37 x 4	5.28	
Description			5.28	

T8-6-24P-830-DIR

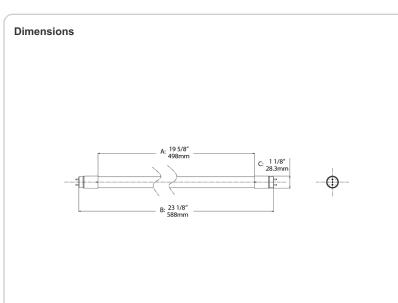

Features

Replacement for conventional Fluorescent T8 linear tubes

Plug and Play, no rewiring, no tools, no instructions

Compatible with most commercial ballasts, refer to our published compatibility guide

Suitable for use in enclosed and open fixtures

Approximately 40% More Energy Efficient that Standard T8 Lamps

Start up instantly, no flicker or hum like conventional fluorescent tubes

Environmentally friendly, no mercury used and are easy to recycle