## TRLED2X4-37N/D10/E





LED performance in an economical 2x4 troffer. Includes emergency battery backup that will operate the LED lamp for 90 minutes if power fails.

Color: White Weight: 15.5 lbs

Project:	Туре:
Prepared By:	Date:

37W
400017
np: 4000K
uracy: 83 CRI
oan: 100000
3,451
91 LPW

## **Technical Specifications**

#### Listings

#### **UL Listing:**

Suitable for damp locations

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80, and have received the Department of Energy "Lighting Facts" label.

#### **DLC Listed:**

This product is on the Design Lights Consortium (DLC)
Qualified Products List and is eligible for rebates from
DLC Member Utilities.

#### **Electrical**

#### Driver:

Constant Current, Class 2, 4-channel driver with 0-10V dimming, 350mA, 120-277VAC 0.46A, Power Factor >94%

## **Dimming Driver:**

Driver includes dimming control for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims as low as 5%.

#### THD:

10.4% at 120V, 12.5% at 277V

#### Construction

#### Lens:

Nominal .125" thick prismatic acrylic lens with diffusion for enhanced optical performance

#### IC Rating:

Suitable for insulated ceilings

#### Housing:

Die-formed 22 gauge, cold-rolled steel

#### Installation:

Standard integral earthquake and NEC T-bar clips secure the fixture to T-bars and prevent T-system separation. For recessed mounting kit see

#### Finish:

High-reflectance (91%) powder coat applied post production for a more durable finish

#### Green Technology:

Mercury and UV free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOC or toxic heavy metals.

#### **LED Characteristics**

#### I FDe

Long-life, high-efficiency, micro-power, surface mount LEDs; binned and mixed for uniform light output and color.

#### Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

## **Color Stability:**

LED Color temperature is warrantied to shift no more than 200K in CCT over a 5 year period.

## Other

#### TRLED2X4-37 with Battery Backup:

Battery backup will operate the LED lamp for 90 minutes if power fails. Wired for 120-277V.

#### California Title 24:

TRLED2X4-37N/D10 complies with 2013 California Title 24 building and electrical codes as a commercial indoor fixture for general spaces when used with a vacancy sensor and 0-10V dimming control. Select a vacancy sensor using catalog number LVS800. 0-10V dimmer provided by others.

#### **Buy American Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act

## Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

#### **Trade Agreements Act Compliant:**


This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

#### **GSA Schedule:**

Suitable in accordance with FAR Subpart 25.4.

# TRLED2X4-37N/D10/E



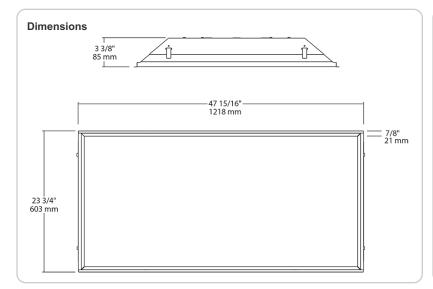

## **Features**

High efficiency, low maintenance alternative to fluorescent

Prismatic lens with diffusion for enhanced optical performance

0-10V dimming standard on all models

Emergency battery backup to provide emergency lighting when power is lost

Optional recessed mounting kit available

100,000-hour LED lifespan

5-Year warranty

Ordering Matrix					
Family	Size	Watts	Color Temp	Dimming	Battery Backup
TRLED					
	<b>2X4</b> = 2' x 4'	<b>37</b> = 37W <b>50</b> = 50W	Y = 3000K (Warm) YN = 3500K (Warm Neutral) N = 4000K (Neutral)	<b>/D10</b> = Dimmable	/E = 120-277V Battery Backup