120-277V



Project:	Туре:
Prepared By:	Date:

Driver Info

LED Info Input Voltage:

Watts: Color Temp:

Lumens:

18W 3500K (Neutral White)

2,100

Efficacy: 117 LPW Color Accuracy: L70 Accuracy: 50,000

82 CRI

Power Factor: 0.9 Flicker: N/A THDi: <20%

Technical Specifications

Listings

UL Recognized:

Yes

UL Classified:

Yes

NSF:

Complies with NSF

FCC: Yes

Rohs: Yes

CEC Status:

Lawful for sale in California

DLC Qualified:

Yes

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from

DLC Member Utilities.

DLC Product Code: P3VE9448

Description

Lamp Type: Linear U-Bend **Bulb Type:**

U-Bent

Base Type:

2G13

Dimmable:

Nο

Material:

Glass

LED Characteristics

Installation Type:

Type B, Ballast Bypass, Single Ended Wire

Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

Construction

Operating Temperature:

-20 - 40°C

MOL (inches):

22.6"

MOD (inches):

1.02"

Other

Equivalent:

32W Fluorescent U-Bent

Warranty: 5 years

Optical

Beam Angle:

240°

Shipping Information

Case Qty:

12


Case Dimensions:

24.02 x 15.55 x 8.86

Pallet Quantity of Pieces:

Pallet Dimensions:

47.24 x 39.37 x 40.16

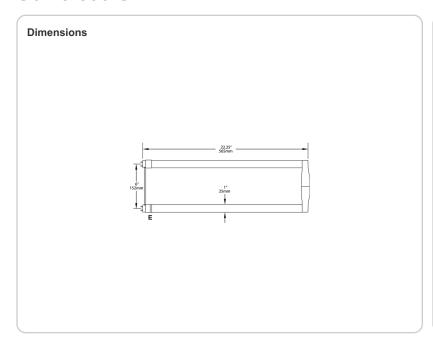

Features

Replacement for conventional Fluorescent T8 or T12 Ubends
Internal Driver eliminates the need for external ballasts or drivers
Single Ended wiring method works on shunted sockets
Suitable for use in enclosed and open fixtures
Approximately 40% More Energy Efficient that Standard T8 Lamps
Start up instantly, no flicker or hum like conventional fluorescent tubes
Environmentally friendly, no mercury used and are easy to recycle