



Replace existing T8 U-Bend fluorescent glass tubes.

Color: White

Weight: 0.9 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Watts:	18W	Input Voltage:	120-277V
Color Temp:	5000K (Daylight)	Power Factor:	0.9
Lumens:	2,200	Flicker:	N/A
Efficacy:	122 LPW	THDi:	<20%
Color Accuracy:	82 CRI		
L70 Accuracy:	50,000		

Technical Specifications

Listings

UL Recognized:

Yes

UL Classified:

Yes

NSF:

Complies with NSF

FCC:

Yes

Rohs:

Yes

CEC Status:

Lawful for sale in California

DLC Qualified:

Yes

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.
DLC Product Code: PUF6NFOS

Description

Lamp Type:

Linear U-Bend

Bulb Type:

U-Bent

Base Type:

2G13

Dimmable:

No

Material:

Glass

LED Characteristics

Installation Type:

Type B, Ballast Bypass, Single Ended Wire

Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

Construction

Operating Temperature:

-20 - 40°C

MOL (inches):

22.6"

MOD (inches):

1.02"

Other

Equivalent:

32W Fluorescent U-Bent

Warranty:

5 years

Optical

Beam Angle:

240°

Shipping Information

Case Qty:

12

Case Dimensions:

24.02 x 15.55 x 8.86


Pallet Quantity of Pieces:

192

Pallet Dimensions:

47.24 x 39.37 x 40.16

Dimensions

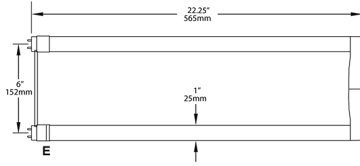

Features

- Replacement for conventional Fluorescent T8 or T12 U-bends
- Internal Driver eliminates the need for external ballasts or drivers
- Single Ended wiring method works on shunted sockets
- Suitable for use in enclosed and open fixtures
- Approximately 40% More Energy Efficient than Standard T8 Lamps
- Start up instantly, no flicker or hum like conventional fluorescent tubes
- Environmentally friendly, no mercury used and are easy to recycle