



Sensor controlled Vandalproof fixtures. VAN 3 up to 42 Watts CFL. VAN5 up to 96 Watts CFL, VAN6 up to 26 Watts CFL @ 120v. Sensor color matched to fixture. Sensor is not vandalproof. Lamp supplied.

Color: Bronze

Weight: 5.1 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

### Lamp Info

Type: 2-13w Twin  
 Watts: 26W  
 Shape/Size: N/A  
 Base: N/A  
 ANSI: N/A  
 Hours: 10,000  
 Lamp Lumens: 1,800  
 Efficacy: 56 LPW

### Ballast Info

Type: NPF 120V  
 Watts: 120V: .3/.3A  
 Shape/Size: 208V: N/A  
 Base: 240V: N/A  
 ANSI: 277V: N/A  
 Hours: Input Watts: 32W  
 Lamp Lumens: Efficiency: 81%

## Technical Specifications

### Listings

#### UL Listing:

Suitable for wet locations.

### Electrical

#### Voltage:

120 volts AC 60 Hz.

#### Surge Protection:

Withstands up to 3000 volts.

#### Manual Override:

Double flip wall switch logic prevents activation by short power outages. Resets after 8 hours. No extra wiring needed.

### Sensor Characteristics

#### Time Adjustment:

5 seconds to 15 minutes CFL lamps have longer life if Time Adjustment is set to > 7 minutes.

#### Quick Test Time:

5 seconds test time for fast installation. Works day or night.

### Other

#### "No Hands" Auto Testing:

Auto mode starts after 4 minutes of testing. No adjustment needed.

### Sensor Case Construction:

Precision molded Lexan.

### Photocontrol:

Deactivates lights during daylight. Fully adjustable for 24 hour operation or custom applications. Please specify voltage.

### Country of Origin:

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

### Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

### Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

### Trade Agreements Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

### GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

### Construction

#### Vandal Resistant Lens:

Hard lens resists vandalism.

#### Built for Severe Conditions:

Double weatherproofing for long life.

#### Min Start Temp:

32° F.

#### Ballast Minimum Starting Temperature:


32

### LED Characteristics

#### LED Detection Indicator:

Glows red day and night for "on-guard" deterrence.

## Dimensions

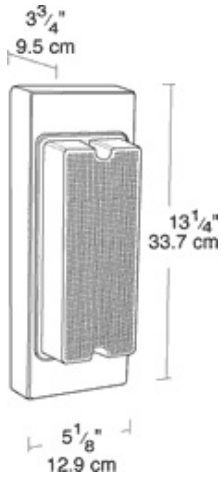

## Features

- Precision die cast aluminum housing with durable polyester powder coating
- Cutoff and standard Wallpacks
- LED "on guard" indicator
- Can be wired in parallel
- Adjustable mini sensor with 180 detection patterned
- Sensor color matches fixture
- Vandal proof fixtures offer sensor controlled compact fluorescent up to 96 Watts