



Color: Bronze

Weight: 4.8 lbs

Project:

Type:

Prepared By:

Date:

**Driver Info**

Type	Constant Current
120V	0.50A
208V	0.35A
240V	0.28A
277V	0.22A
Input Watts	30-59.5W

**LED Info**

Watts	60W
Color Temp	3000K/4000K/5000K
Color Accuracy	83-85 CRI
L70 Lifespan	100,000 Hours
Lumens	3891-8372
Efficacy	129.7-146.4 lm/W

**Technical Specifications****Field Adjustability****3-Way Field Adjustable:**

Field Adjustable Light Output:  
30W/50W/60W (factory default 60W)  
Color temperature (selectable by 3000K, 4000K and 5000K)

**Compliance****UL Listed:**

Suitable for wet locations

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**DLC Listed:**

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: PTG13VXA

**Electrical****Driver:**

Constant Current, Class 2, 120-277V, 50/60Hz, 120V:  
0.50A, 208V: 0.35A, 240V: 0.28A, 277V: 0.22A

**Dimming Driver:**

Driver includes wiring for 0-10V dimming systems.  
Dim as low as 10%.

**THD:**

15.74% at 120V, 13.59% at 277V

**Power Factor:**

98.6% at 120V, 93.3% at 277V

**Photocell:**

120-277V selectable photocell that can be turned on and off.

**Note:**

All values are typical (tolerance +/- 10%)

**LED Characteristics****LEDs:**

Long-life, high-efficacy, surface-mount LEDs

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Construction****IP Rating:**

Ingress protection rating of IP65 for dust and water

**Cold Weather Starting:**

Minimum starting temperature is -40°C (-40°F)

Technical Specifications (continued)

Construction

Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

Housing:

Precision die-cast aluminum

Mounting:

Trunnion mount with stainless steel hardware

Lens:

Tempered glass

Reflector:

Polycarbonate

Effective Projected Area:

EPA = 0.68

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Optical

NEMA Type:

NEMA Beam Spread of 7H x 7V

Other

Shorting Cap:

Shorting Cap for Twistlock Receptacle


5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

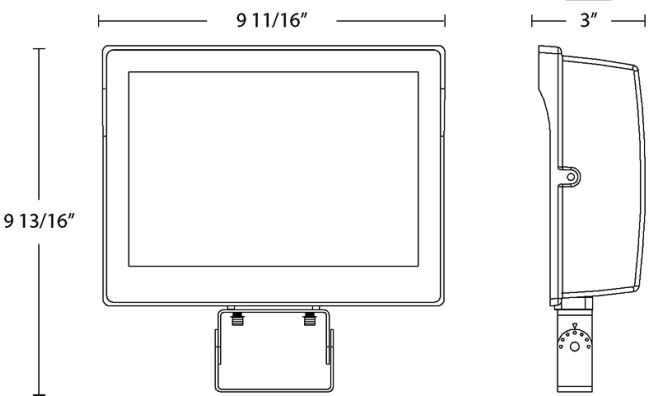

Features

- 3-Way field adjustability
- 0-10V Dimming, standard
- 100,000-hour LED lifespan
- Selectable photocell (on/off) included
- 5-Year, Limited Warranty

Ordering Matrix

Family	Wattage	Field Adjustability	Color Temp	Mounting	Finish	Voltage	Options
X17	XFU	60		T			
35 = 35/25/15W 60 = 60/50/30W 80 = 80/60/40W 15 = 15W 35 = 35W 60 = 60W 80 = 80W 105 = 105W 140 = 140W 105 = 105/75/50W 140 = 140/100/70W 205 = 205/150/100W 330 = 330/250/170W		XFU = 3-Way Field Adjustable		Blank = 3000/4000/5000K Selectable		Blank = Knuckle SF = Slipfitter T = Trunnion	
				Blank = Bronze W = White		Blank = 120-277V /480 = 480V	
						Blank = Selectable photocell	