

UTOPIA™ LED A19

Direct Replacement for Incandescent A19 Lamps

With the Utopia LED A19 lamp, Ushio America delivers a true omni-directional LED replacement for the popular 60W A19 incandescent lamps.

These dimmable LED A19 lamps replicate the form, fit and function of traditional E26 base incandescent A19 lamps, but they last up to 25 times longer. With a rated life of 25,000 hours and an energy savings of 85% compared to 60W incandescent lamps, the Utopia LED A19 is ideal for most applications.

Ushio is proud to stand behind these ENERGY STAR qualified LED lamps with a 3-year warranty. The 9.5W LED A19 lamps operate on 120V with Warm White (2700K) and Daylight (5000K) color temperatures and are available in E26 medium base.



FEATURES & BENEFITS:

- Energy Saving
- Dimmable
- Replacement for 60W Incandescent Lamps
- Omni-Directional Lighting
- Long Life: 25,000 Hours
- Application Friendly: UV Free & IR Free
- Environmentally Friendly: Mercury Free, Lead Free & RoHS Compliant
- 3-Year Warranty

APPLICATIONS:

- Hotel & Restaurant Lighting
- Residential Lighting
- Retail Lighting
- Accent Lighting
- Office Lighting

Qualifications:



Distributed by:

UTOPIA™ LED A19 SERIES

Direct Replacement for Incandescent A19 Lamps



Watts (W)	Ordering Code	Lamp Description	Bulb Type	Volts (V)	Color Temp (K)	Lumens* (lm)	CRI	Avg** Life (h)	Case Qty
9.5	1003978	★ 9.5W UTOPIA LED A19, DL50	A19	120	5000	800	83	25,000	12
9.5	1003979	★ 9.5W UTOPIA LED A19, WW27	A19	120	2700	800	83	25,000	12



* Photometric data is based on LM-79 tests.

** Average life based on 70% lumen maintenance.

★ ENERGY STAR Certified

CAUTIONS:

This lamp may not be compatible with all dimmers. Check www.ushio.com to find up to date dimmer compatibility options. Use only 120V 60Hz circuits. Do not open. No user serviceable parts inside. Use is not recommended where exposed to weather, outdoor usage requires an enclosed fixture. This device is not intended for use with emergency exit fixtures, emergency exit lights, photo controls, electric timers. Fully enclosed or recessed fixtures must contain proper ventilation. Reliable Operating temperature is -4° F to 113° F. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

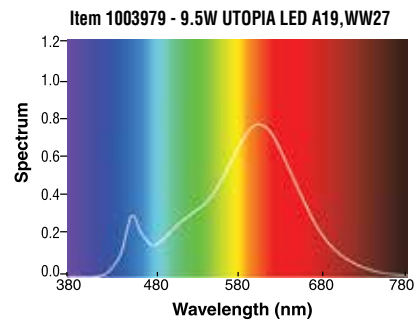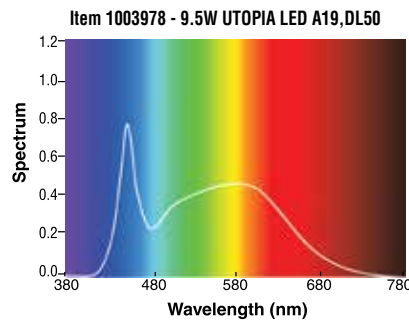

**Lighting Facts/
Faits d'éclairage**

Per Bulb/Par l'ampoule

Brightness/Luminosité 800 lumens

**Estimated Yearly Energy Cost/
Coût énergétique annual estimé** \$1.14
Based on 3 hrs/day, 11¢/kWh. Cost depends on rates and use. /Basé sur 3 heures/jour, 11¢/kWh. Les coûts dépendent du tarif et de la fréquence d'utilisation.

Life/Vie 22 years/ans
Based on 3 hrs/day. /Basé sur 3 heures/jour.

Light Appearance/Apparence de l'éclairage
Warm/Chaud ————— Cool/Froid
5000K

Energy Used/Énergie utilisée 9.5 watts

**Lighting Facts/
Faits d'éclairage**

Per Bulb/Par l'ampoule

Brightness/Luminosité 800 lumens

**Estimated Yearly Energy Cost/
Coût énergétique annual estimé** \$1.14
Based on 3 hrs/day, 11¢/kWh. Cost depends on rates and use. /Basé sur 3 heures/jour, 11¢/kWh. Les coûts dépendent du tarif et de la fréquence d'utilisation.

Life/Vie 22 years/ans
Based on 3 hrs/day. /Basé sur 3 heures/jour.

Light Appearance/Apparence de l'éclairage
Warm/Chaud ————— Cool/Froid
2700K

Energy Used/Énergie utilisée 9.5 watts



Scan with a smartphone to view this product online.

Form No. S-UTOPIALED19-0315
Specifications may be subject to change without prior notice. Refer to www.ushio.com for the most current product specifications.

USHIO