



Kit includes 2 H101 Bell floodlights pre-assembled on a CU4 universal mounting

Color: Bronze

Weight: 5.3 lbs

| Project: | Туре: |
|--------------|-------|
| Prepared By: | Date: |

| Lamp Info | | Ballast Info | | |
|--------------|-------|--------------|-----|--|
| Type: | PAR38 | Type: | N/A | |
| Watts: | 300W | 120V: | N/A | |
| Shape/Size: | N/A | 208V: | N/A | |
| Base: | N/A | 240V: | N/A | |
| ANSI: | N/A | 277V: | N/A | |
| Hours: | N/A | Input Watts: | 0W | |
| Lamp Lumens: | N/A | | | |
| Efficacy: | N/A | | | |
| | | | | |

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Suitable for mounting within 1.2m (4ft) of the ground. Can be aimed above horizontal with accessory hood or visor.

Electrical

Sockets:

Porcelain with all copper current carrying components.

Other

Compatibility with old H100:

H101 floods and accessories replace the discontinued RAB H100 and accessories. Parts are not interchangeable. Contact factory for price and availability of the old H100 Series.

Construction

Swivels:

Fully adjustable with sure-grip locks. 1/2" NPS threaded arm with serrated locking swivel fits all standard mounting covers. Color matched EZ Grip lock nuts.

Housings:

Die cast aluminum with powder coat finish.


Gaskets:

High temperature silicone rubber extends around both socket and lamp.

Optical

Lamps:

Medium base Par-38 lamps up to 150 watts. Halogen lamps give brighter light and choice of beam spreads.

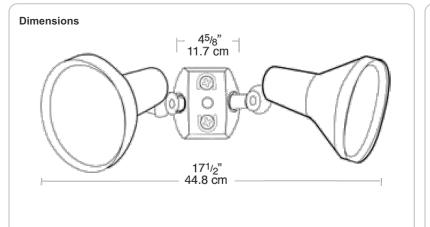

Features

Lamp recessed 1" from lip for side glare reduction

Set screw for hood, grill or visor attachment

Heavy duty mounting arm with internal O-ring, locking teeth, and stainless steel screw

Large Silicone rubber gasket provides weatherproof protection around the lamp and socket

HV1 Visor with integral guard and glass lens for maximum glare reduction and lamp protection

HG1 Guard: Protects lamp from damage and vandalism

HH1 Hood with glass lens reduces glare and protects lamp from water and impact damage