

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	18.00W
120V	0.16A	Color Temp	3500K (Warm Neutral)
208V	0.096A	Color Accuracy	80 CRI
240V	0.083A	L70 Lifespan	50,000
277V	0.069A	Lumens	1,719
Input Watts	16.70W	Efficacy	102.9 LPW
Efficiency	N/A		

## Technical Specifications

### Listings

#### UL Listed & UL Classified:

Suitable for wet locations

#### ENERGY STAR V2.2:

This product is ENERGY STAR® Version 2.2 Certified.

#### Energy Star Model Number:

DLC0006

#### Energy Star ID:

2350026

### Electrical

#### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims as low as 10%.

#### THDi:

Produces less than 20% THD

#### PF:

≥0.9

#### Input Voltage:

120V through 277V

#### Operating Frequency (Hz):

50/60Hz

### LED Characteristics

#### Lifespan:

50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

#### Wattage Equivalency:

32W CFL

#### Flicker:

Silent and flicker free operations of less than 30%

### Construction

#### IC Rated:

Suitable for direct contact with insulation

#### Air Tight:

Housing certified Air Tight as per ASTM E283

#### Housing:

Made from precision die-cast aluminum construction, dissipates heat from electrical components

#### Cold Weather Starting:

The minimum starting temperature is -30°C (-22°F)

#### Maximum Ambient Temperature:

Suitable for use in 40°C (104°F)

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

#### Mounting:

Robust retention clips spring loaded tabs ensure the fixture is securely installed. Can be installed in 1/4" to 1 1/2" thick ceilings.

## Technical Specifications (continued)

### Construction

#### Lens:

Diffuse Polystyrene lens produces smooth uniform light that is glare free

#### Finish:

Matte White

### Optical

#### Beam Angle:

90°±10°

#### Other

#### Template:

Template included for easy ceiling cut out

### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).


### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.


## Case and Pallet Dimensions

	QTY	LENGTH	WIDTH	HEIGHT
CASE	4	16.12	121.12	8.21
PALLET	400	7.75	7.75	85.04

## Dimension

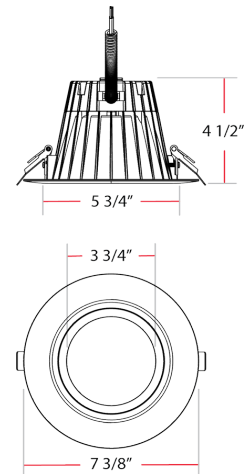

## Light Distribution

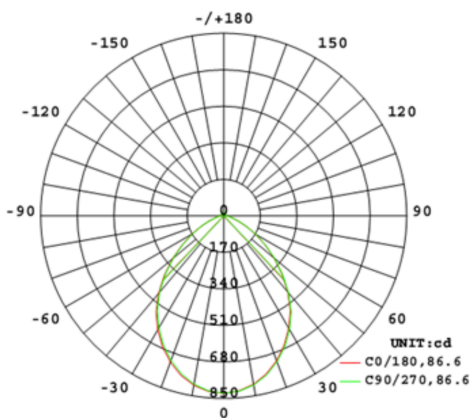

## Features

- High Performance LEDs for commercial applications
- Replacement for traditional compact fluorescent recessed downlights
- Compatible with new construction or retrofit installations
- UL wet and Energy Star rated
- Meets air-tight requirements
- Matte white smooth trim finish
- Available in 3 CCTs: 3000K, 3500K, 4000K
- 0 - 10V dimmable
- Spring loaded retention clips
- 25-inch Flexible conduit
- 5-Year, No-Compromise Warranty

## Ordering Matrix

Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish
C	6	R	18	835	UNV	W
	6 = 6" 8 = 8"	R = Round	12 = 900lm-1050lm 18 = 1500lm-1700lm 24 = 2000lm-2300lm 33 = 3000lm-3500lm	940 = 90 CRI, 4000K (Neutral) 935 = 90 CRI, 3500K (Warm Neutral) 930 = 90 CRI, 3000K (Warm) 840 = 80 CRI, 4000K (Neutral) 835 = 80 CRI, 3500K (Warm Neutral) 830 = 80 CRI, 3000K (Warm)	UNV = 120-277V (0-10V Dimming)	W = White