


Project:

Type:

Prepared By:

Date:

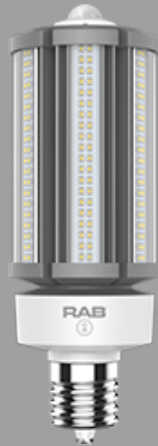

UPC: 019813519203



Features and Benefits

Technical Specifications

Lightcloud

Lightcloud Enabled:

Lightcloud is a commercial wireless lighting control system fully developed and supported by RAB. It's powerful and flexible, yet easy to use and install.

Other

Warranty (Years):

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Gateway Required:

Yes, connects to Lightcloud Gateway and other Lightcloud devices

Communication Protocol:

Zigbee

Equivalency:

200W Metal Halide

Performance

Product Type:

HID

Input Wattage:

54W

Typical Lumen Output:

8100

Efficacy:

150 lm/W

L70 Lifespan:

50,000 Hours

Construction

Bulb Shape:

Post Top

Base Type:

EX39

Beam Angle:

360°

Finish:

White

Electrical

Power Factor:

>0.9

Input Voltage:

100-277V

Technical Specifications (continued)

Electrical

Operating Frequency:

50/60Hz

Electrical Characteristics

THD:

<20%

Power Monitoring:

Yes, TRIAC Dimming - Forward and Reverse Phase dimming. Please refer to dimmer compatibility chart.

Surge Protection:

10kV

Operating Current:

20mA

Compliance

Damp Rated:

Suitable for damp locations

UL Listed:

Yes

Enclosed Fixtures:

Suitable for use in enclosed fixtures

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

FCC:

Yes

Module / Sensor

Occupancy Sensor:

Passive Infrared Motion Sensor

Daylight Harvesting:

Yes

Input Voltage:

12V

Output Voltage:

0-10V

Max Mounting Height:

20ft

Rating:

IP20

Wireless Range

Line-of-Site:

700 feet

Obstructions:

70 feet

Installation

Installation:

Lightcloud module provided inside the package must be installed into the lamp prior to installation. Module plugs into the top of the lamp via 3.5MM Auxiliary port.

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	4	20.47	20.47	10.04
PALLET	64	42.5	42.5	44.9

Dimension

