



Color: Bronze

Weight: 334.9 lbs

Project:	Type:
Prepared By:	Date:

Technical Specifications

Listings

CSA Listed:

Suitable for wet locations

Construction

Description:

Steel pole 5" round 7 gauge 30 foot drilled two sides square base

Shaft:

46,000 p.s.i. minimum yield.

Hand Holes:

Reinforced with grounding lug and removable cover

Base Plates:

36,000 p.s.i. minimum yield.

Color:

Bronze powder coating

Height:

30 FT

Gauge:

7

Wall Thickness:

3/16"

Shaft Size:

5"

Anchor Bolt Templates:

WARNING Template must be printed on 12" x 18" sheet for actual size. CHECK SCALE BEFORE USING. Templates shipped with anchor bolts and available [online](#).

Max EPA's/Max Weights:

70MPH 11.8 ft./380 lb.
 80MPH 7.6 ft./360 lb.
 90MPH 4.7 ft./310 lb.
 100MPH 2.6 ft./290 lb.
 110MPH 1.1 ft./270 lb

Accessories:

Base/Cap: [BCK-R5](#)
 Anchor Bolts: [BOLT5-8](#)

Other


Terms of Sale:

Pole Terms of Sale is available [online](#).

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

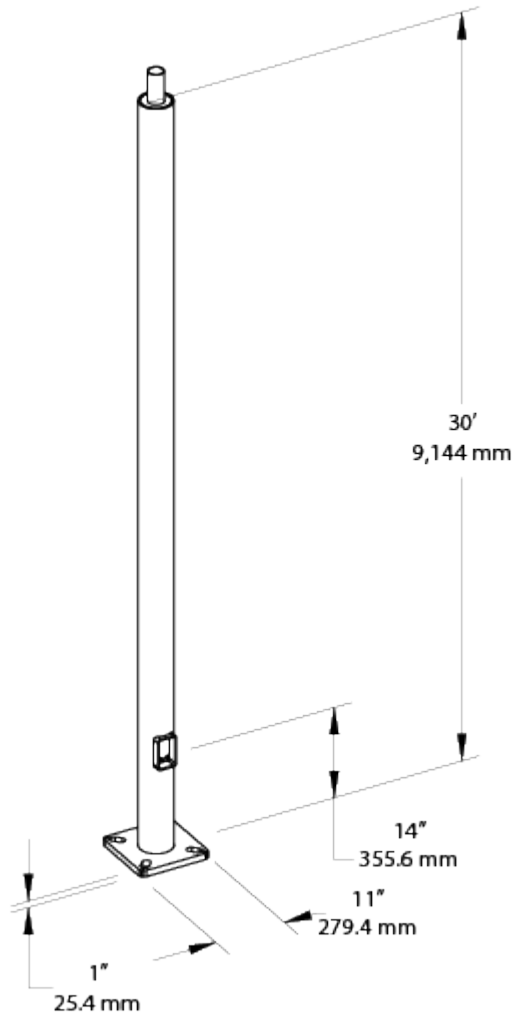

Ordering Matrix

Family	Shape	Size	Gauge	Height	Drilled/Welded Tenon
P	R	5	7	30	D2
	R = Round	4 = 4"	7 = 7	10 = 10'	D2 = Drilled
	TR = Taped Round	5 = 5"	11 = 11	15 = 15'	WT = Welded Tenon
		6 = 6"		20 = 20'	
		7 = 7"		25 = 25'	
		8 = 8"		30 = 30'	