



<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	29W
120V	0.25A	Color Temp	3500K (Warm Neutral)
208V	0.14A	Color Accuracy	84 CRI
240V	0.12A	L70 Lifespan	60,000
277V	0.11A	Lumens	3,202
Input Watts	26.7W	Efficacy	119.9 lm/W

## Technical Specifications

### Lightcloud

#### Lightcloud Controller Installed:

Integrated/embedded networked lighting control, luminaire-level lighting control. Fixture, Zone, and plug-load control from one powerful device. LLLC - capable of switching, 0-10V dimming, power/energy monitoring. Can also be used to extend the range of the Lightcloud mesh network communication protocols. Can be attached to fixture, junction box, or electrical panel.  
 DLC system - N1XMLOEATBA  
[Learn more about Lightcloud.](#)

### Listings

#### UL Listed:

Suitable for damp locations

#### CCEA Compliant:

Luminaire Requirements used in Environmental Air Space per the electrical code specification of the City of Chicago

#### IESNA LM-79 & IESNA LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

### Electrical

#### Driver:

Class 2, Constant Current, 120-277V, 50/60Hz, 120V: 0.25A, 208V: 0.14A, 240V: 0.12A, 277V: 0.11A

#### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

#### THD:

3.48% at 120V, 7.48% at 277V

#### Power Factor:

99.6% at 120V, 91.7% at 277V

#### Surge Protection:

2.5kV

### Construction

#### Cold Weather Starting:

The minimum starting temperature is -20°C (-4°F)

#### Ambient Temperature:

Suitable for use in up to 40°C (104°F)

#### IC Rated:

Suitable for direct contact with insulation

#### Housing:

Die-formed, 24-gauge, cold-rolled steel

#### Mounting:

Integral T-grid clips make installation easy and secure

## Technical Specifications (continued)

### Construction

#### Reflector:

Integral reflector (on the sides) with high reflectance finish, optimized for uniform distribution.

#### Lens:

Frosted polycarbonate

#### Finish:

Formulated for high durability and long-lasting color

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

#### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Performance

#### Lifespan:

60,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

### Other

#### Equivalency :

Equivalent to (3) F17T8


### 5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

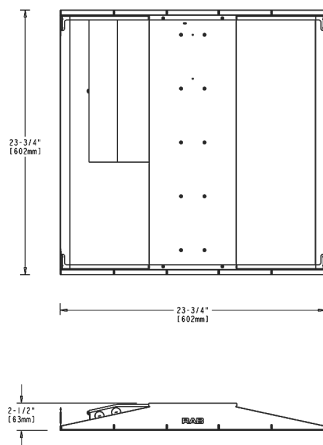

## Features

Optional surface and recessed mount kits available

Optional programmable occupancy sensor for multi-level lighting control

0-10V dimming standard on all models

60,000-hour LED lifespan

5-Year, Limited Warranty

## Ordering Matrix

Family		Size		Wattage		Color Temp		Options
SWISH34	-	2X2	-	29		YN		/LC
		<b>2X2</b> = 2' x 2' <b>2X4</b> = 2' x 4'		<b>19</b> = 19W (2' x 2') <b>29</b> = 29W (2' x 2', 2' x 4') <b>39</b> = 39W (2' x 4')		<b>N</b> = 4000K (Neutral) <b>YN</b> = 3500K (Warm Neutral)		<b>Blank</b> = No Option <b>/E2</b> = Battery Backup <b>/LC</b> = Lightcloud® Controller <b>/LCS</b> = Lightcloud® Sensor <b>/PIR</b> = Passive Infrared Occupancy Sensor <b>/LC/E2</b> = Lightcloud® Controller w/ Battery Backup <b>/LCS/E2</b> = Lightcloud® Sensor w/ Battery Backup <b>/PIR/E2</b> = Passive Infrared Occupancy Sensor w/ Battery Backup