

Replace existing fluorescent tubes. Glass and plastic models available.

Color: White Weight: 0.4 lbs

Project:	Туре:
Prepared By:	Date:

Driver Info LED Info

Watts: 12W Input Voltage: Ballast Dependent Color Temp: 4000K (Cool White) Power Factor: Ballast Dependent

 Lumens:
 1,800
 Flicker:
 N/A

 Efficacy:
 150 LPW
 THDi:
 <20%</td>

Color Accuracy: 82 CRI L70 Accuracy: 50,000

Technical	<b>Specifications</b>
-----------	-----------------------

Listings

UL Listed:

Yes

NSF:

Complies with NSF

FCC:

Yes Rohs:

Yes

0=0.04.4

CEC Status:

Lawful for sale in California

**DLC Qualified:** 

Yes

**DLC Listed:** 

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

DLC Product Code: PYL0QIHQ

Description

Lamp Type:

Linear T8 **Bulb Type:** 

T8

Base Type: MOD (inches):

G13, Medium Bipin 1.09"

Dimmable:

No

Length:

4ft

Material: Glass

LED Characteristics

Installation Type:

Type A, Plug and Play

Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

Construction

**Operating Temperature:** 

-20 - 40°C

Bare Lamp Illuminated Length (inches):

47.22"

MOL (inches):

47.5"

1.09"

Other

**Equivalent:** 32W Fluorescent T8

Warranty: 5 years Optical

Beam Angle:

240°

**Shipping Information** 

Case Qty:

25

Case Dimensions:


49.2 x 7.87 x 7.28

**Pallet Quantity of Pieces:** 

750

Pallet Dimensions:

49.21 x 39.37 x 48.82

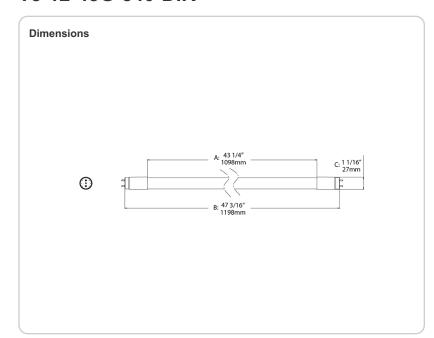

## **Features**

Replacement for conventional Fluorescent T8 linear tubes

Plug and Play, no rewiring, no tools, no instructions

Compatible with most commercial ballasts, refer to our published compatibility guide

Suitable for use in enclosed and open fixtures

Approximately 40% More Energy Efficient that Standard T8 Lamps

Start up instantly, no flicker or hum like conventional fluorescent tubes

Environmentally friendly, no mercury used and are easy to recycle